



For
SIGN
GRAPHICS

Roll-to-Roll LED-UV Curable Inkjet Printer

UJV100-160



NEW! Newly developed UV LED Ink **LUS-210**

LUS-210 is an environmental-friendly ink, which is selectable from the three types of ink set combinations in accordance with your job.

The six colors of C, M, Y, K, W, Cl (*) are prepared to be able to choose one combination from three ink sets (CMYK, CMYK + W, CMYK + WCl) to suit your job. The selection of white ink of high density and opacity and the glossy clear ink are suitable for a wide range of applications: the printability on transparent / colored media and the varnished print with high design properties.

In addition, LUS-210 has acquired "GREENGUARD Gold certification", which is guaranteed to be suitable for schools and medical institutions based on the strictest chemical substance diffusion standards in the world. This ink generates almost no VOC (*2)(*3), which is the cause of photochemical oxidant generation, and is designed to reduce load to the global environment.

*1: Clear ink will be supported later. *2: VOC=Volatile organic compounds
*3: No volatile organic compounds are generated after UV curing by our internal investigation, but may occur very slightly before curing.



Specifications

Item	UJV100-160	
Print head	On-demand piezo head (2 staggered layout)	
Print resolution	360 dpi, 720 dpi, 900 dpi, 1200 dpi	
Ink	Type	UV curable ink "LUS-210" (C,M,Y,K,W,CL)
	Color	CMYK / CMYKW / CMYKWCL
	Capacity	1L (Bottle supply)
Maximum printable area	1,610 mm (63.4 in)	
Maximum media width	1,620 mm (63.8 in)	
Media thickness	1.0 mm or less	
External diameter of media	Φ 250 mm (9.8 in) or less	
Media weight	45 kg (99.2 lb) or less	
Interface	USB 2.0 / Ethernet 1000BASE-T	
Power	Single-phase AC 100-120 V/200-240 V ±10% 50/60 Hz ± 1 Hz	
Power consumption	AC 100 V :1.44 kW ore less / AC 200 V : 1.92 kW or less	
Operational environment	Temperature: 20 - 30 degC (68 - 86 degF) Humidity: 35 - 65%Rh (without condensation)	
Dimensions (W x D x H)	2,775 x 700 x 1,475 mm (109.3 x 31.5 x 58.1 in)	
Weight	167 kg (368.2 lb) or less	

Supplies

	Color	Item code	Remarks
LUS-210 UV ink	Cyan	LUS21-C-BA	1L bottle
	Magenta	LUS21-M-BA	
	Yellow	LUS21-Y-BA	
	Black	LUS21-K-BA	
	White	LUS21-W-BA	
	Clear (*)	LUS21-CL-BA	

The LUS-210 is GREENGUARD Gold certification ink. * Clear ink will be supported later.

Software

Raster Link 6 PLUS

Functions with ultimate usability

- ◆ "Simple icon display" for intuitive and comprehensible operability
- ◆ Registering "favorites" in the preferences to shorten operation time

Ethernet supported!

Create a free and efficient working environment

Ex.
Print data editing on an office PC to send the data to print directly to a printer at the work site

Inks and substrates:

● Please note that properties and adhesion, weather resistance, etc. of ink and substrates can vary. Please test materials before printing.

Safety notice:

These printers produce UV radiation. To protect your health, please observe the following guidelines carefully:

- Do not look directly into the UV light source, or expose your skin (such as your hands) directly to the UV light source.
- Depending upon the print mode, some VOCs could be emitted from printed area not yet cured and hardened.
- In addition, please read and follow the instructions and guidelines of the manual carefully.

● Some examples shown in this catalogue are artificial renderings. ● Specifications, designs and dimensions shown in this catalogue may be subject to change without notice for technical improvements. ● The corporate and merchandise names in this catalogue are the trademarks or registered trademarks of the respective corporations. ● Inkjet printers use extremely fine dots, so colors may vary slightly after replacement of print heads. ● Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences. ● Please note that descriptions and data in this catalogue are as of April 2020.

Mimaki MIMAKI ENGINEERING CO., LTD.
mimaki.com 2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan
Tel. +81-268-64-2281


Mimaki Global Network

USA	MIMAKI USA, INC.	Europe	MIMAKI EUROPE B.V.
Brazil	MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA	Indonesia	PT. MIMAKI INDONESIA
India	MIMAKI INDIA PRIVATE LIMITED	Australia	MIMAKI AUSTRALIA PTY. LTD.
Taiwan	MIMAKI ENGINEERING (TAIWAN) CO.,LTD.	China	SHANGHAI MIMAKI TRADING CO.,LTD.
Singapore	MIMAKI SINGAPORE PTE. LTD.	Thailand	MIMAKI (THAILAND) CO.,LTD.

DB10356-01

Ultimate machine filled with the Mimaki quality



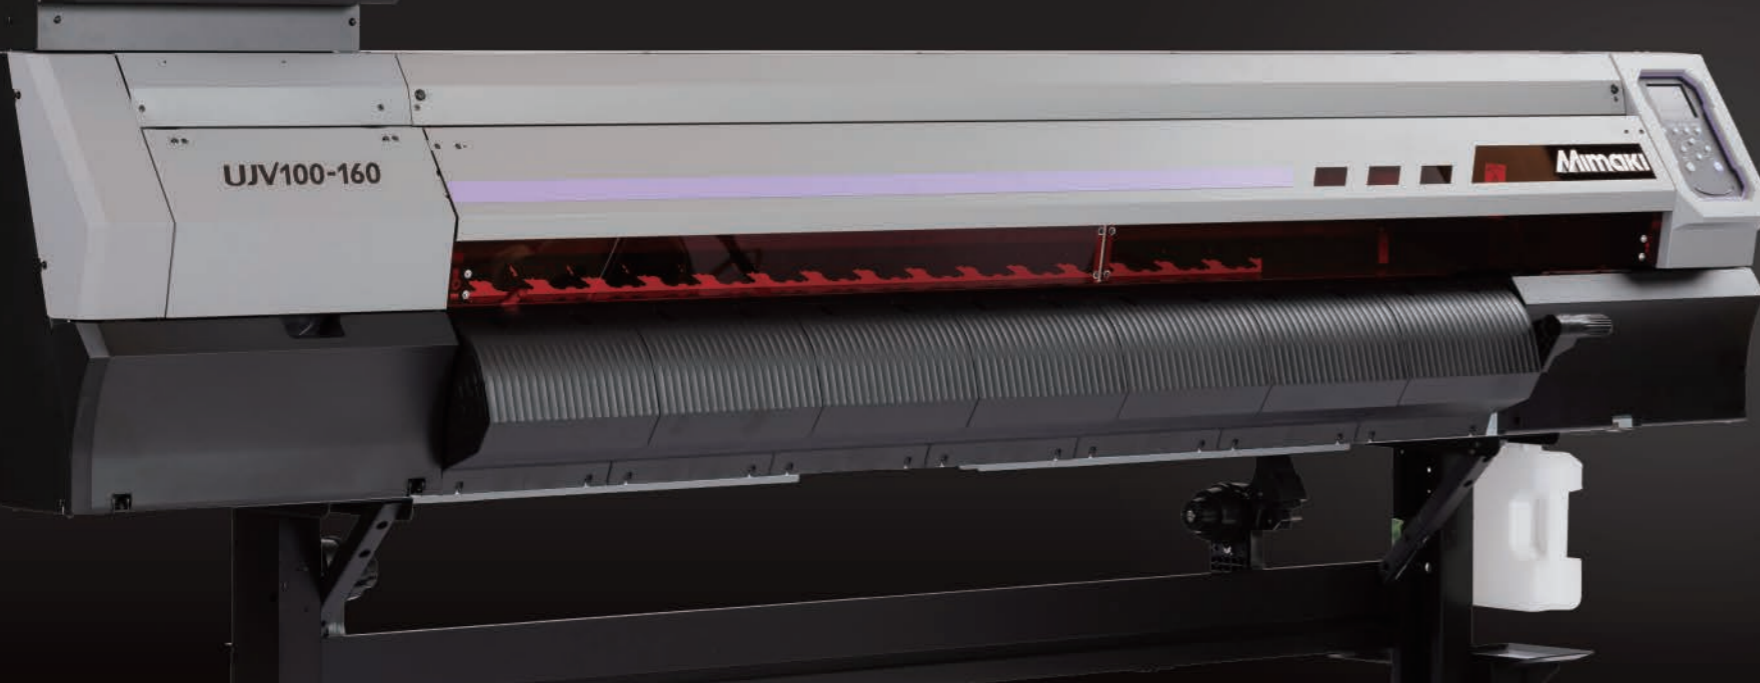

Ready to GO!

Fully equipped with the latest functions for Mimaki Quality

The unit of Mimaki technology for high image quality, stable operation, high productivity, and improved usability

UJV100-160

Reliable functions of UJV100-160 for Mimaki Quality

DAS (Dot Adjustment System) **NEW!**

DAS: The function to adjust automatically the dot position and the feed amount that affect print quality as the standard equipment.

After changing a media and a printing condition, the ink dot position and media feeding amount must be adjusted accordingly. Since DAS automatically applies them, printing can be performed without labor and variation of adjustment by the operator (*1).

DAS
It is the function to print a dedicated pattern to the media and read by the sensor mounted on the carriage to adjust automatically:

- Dot position (Dot jetting position at the bi-direction)
- Feeding amount (Media feeding amount)

* 1 : Some media cannot be automatically applied.




Improper dot position Overlap/Black streaks (Insufficient feeding amount) Gap/White streaks (Excessive feeding amount)



Proper dot position and feeding amount

Minimum ink size 4pl Beautiful print of less granularity feeling


Three different ink dot sizes are used in printing to enable high-quality print with reduced granular feeling.

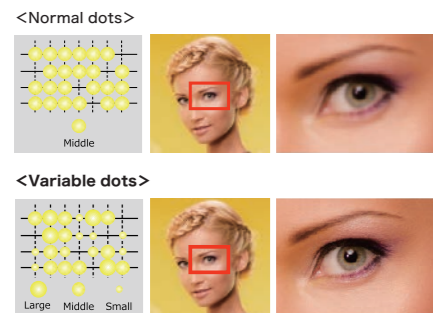

Dots are combined with the minimum size of 4pl to enable smooth color printing with less granular feeling.

"MAPS4" supported (Mimaki Advanced Pass System) Banding reduction function


By printing the border of the path in a gradation tone, banding (horizontal stripes), uneven color, and glossy stripes are reduced to achieve smooth printing.

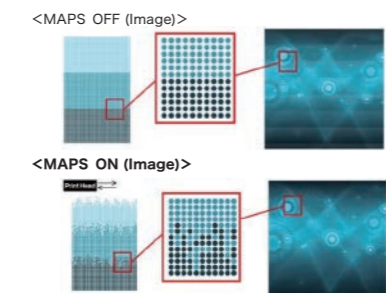

Based on printing conditions such as media/ink type and resolution, the most suitable gradation pattern is automatically selected and printed.


No drying time

You can start next process immediately like the lamination with no waiting for ink drying as the ink is cured by UV irradiation.

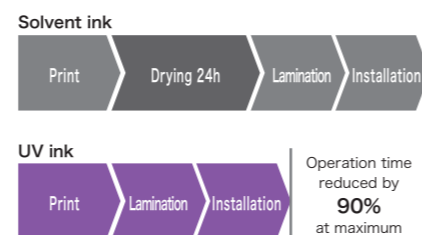



NCU/NRS employed to monitor missing nozzles

The sensor automatically detects the condition of nozzles. When the NCU (Nozzle Check Unit) detects a missing nozzle, it automatically performs cleaning. If there is a nozzle problem left unsolved by the cleaning, NRS (Nozzle Recovery System) automatically replaces the defective nozzles with other nozzles, and enables users to continue their operation without waiting for service personnel.

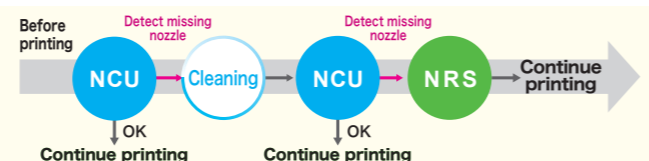

High productivity

Print speed
Tarpaulin 23.0 m/h
Glossy PVC 18.6 m/h

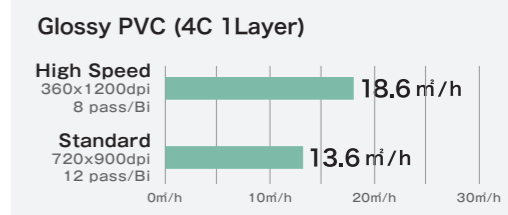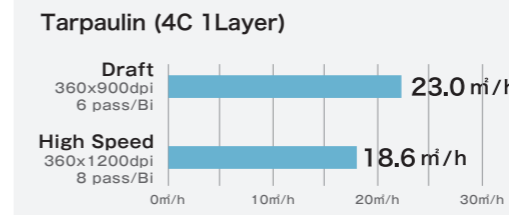

Ink set : 4C(CMYK)


Reliable productivity that can respond to sudden requests of printing job with high-speed printing

The important features enabled by UV curable ink

Abundance of available media materials

In addition to PVC and tarpaulin, fabric and paper without ink receiving layer are possible to print, which are difficult with solvent ink or latex ink. Printing on PET film is also available. (*2) A variety of proposals to clients are available by the high versatility for media.

*2 : Be sure to perform a pre-evaluation.

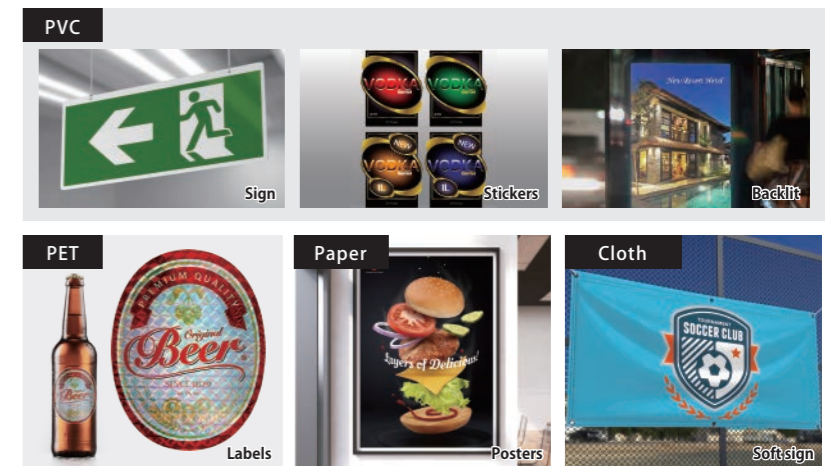

White ink for high value-added print with diverse powers of expression

By applying white ink, it is possible to print on transparent media and colored media (*3) to obtain a wider range of expression. Beautiful finishing of high density white ink gives an excellent printability for sign displays such as light box in stations and commercial facilities, window display, indoor sign, decoration, POP etc.

*3 : Applied to 2 layers printing but not applied to printing more than 2 layers such as 'White - Color - White'

